

# SCHÖNOX iFIX™ EXCEPTIONAL SOLUTIONS, FAST.




## ROLLABLE WATERPROOF SEALING ADHESIVE

Our Schönox iFIX™ Waterproof Sealing Adhesive offers a 40% faster installation time over traditional methods, with exceptional coverage and bond strength. Schönox iFIX™ can be combined with our Schönox AB and ST waterproofing materials to produce a comprehensive shower assembly system that's ideal for commercial or residential use.

©2023\_HPS\_iFIX\_SELLSHEET\_HPS2191

Take your business to a whole new level. Call 855.391.2649 or visit [hpsubfloors.com](http://hpsubfloors.com) to learn how your projects run smoother with Schönox On It.



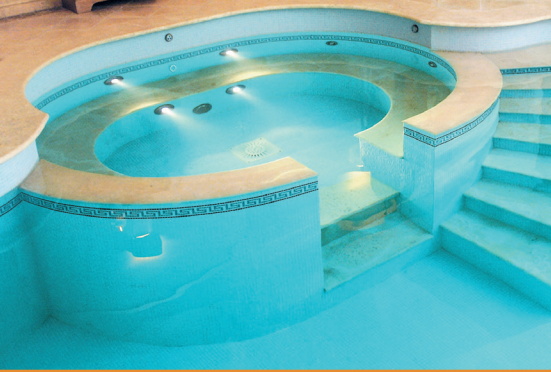

# SCHÖNOX iFIX™

COMPLETE THE JOB FASTER WITH THIS UNIQUE SYSTEM SOLUTION

Schönnox offers every component needed to construct a maintenance-free, watertight shower assembly. Suitable for swimming pools, balconies and terraces in interior and exterior applications. Combine Schönnox iFIX™ with the Schönnox waterproofing accessories shown below.



## INSTALLATION

Break all-time installation speed records with Schönnox iFIX™. Using this unique and innovative 2-in-1 system, you can seal the membrane and the seams at the same time. iFIX™ is efficient and easy to apply with a roller, saving 40% of your working time. This application method also reduces material used, therefore saving you money.

## APPLICATION

The Schönnox iFIX™ and Schönnox waterproofing accessories are compatible with all brands of pre-manufactured shower pans or can be used in conjunction with Schönnox US for a poured pan. Either way, you are guaranteed to make quick and efficient work of constructing maintenance-free, watertight shower assemblies.

## PACKAGING

- Combi pail: - 7.7 lbs/3.5 kg net.wt. in paper bag (powder component)
- 1.61 gal/4.8 kg net.wt. in plastic container (liquid component)

\*Refer to Technical Data Sheets for additional, current information. Available on the Schönnox App and hpsubfloors.com.

## TECHNICAL DATA

- Color: powder component - grey dispersion - blue
- Pot life: approx. 45 min. at +70°F / 21°C
- Application temperature: not below 41°F / 5°C
- Ready for covering:
  - after approx. 1 hour on porous substrate
  - after approx. 12 hour on non-porous substrates
- Coverage: approx. 105 sq.ft.



## LEED V4

May help contribute to LEED v4 certification of projects in these categories:

- EQc2 – 3 points Low-Emitting Materials
- MRC1 – up to 2 points Life-Cycle Impact Reduction
- MRC2 – 1 point Environmental Product Declaration
- MRC4 – 1 point Material Ingredient

## WATERPROOFING ACCESSORIES:



iFIX™



ST Sealing Tape



ST IC-Interior Corners



ST EA-Exterior Corners



Sealing, Waterproofing Sheet Membrane




ST D8 Pipe Cover  
4.73" x 4.73"w / 5/16" hole diameter



ST D15 Pipe Cover  
4.73" x 4.73"w / 5/8" hole diameter



ST FC Sleeve  
16.75" x 16.75"



1. Schönnox iFIX™ is used on both walls and floors along with Schönnox AB using a larger roller.



2. iFIX™ is used to adhere the Schönnox ST accessories using the 4" roller.



3. The AB layer is overlapped at the seams and adhered using Schönnox iFIX™.



4. A straightedge is used to press out any air pockets.



5. Tiles can be installed right away, speeding the installation process tremendously.

Take your business to a whole new level. Call 855.391.2649 or visit [hpsubfloors.com](http://hpsubfloors.com) to learn how your projects run smoother with Schönnox On It.



**SCHÖNOX**<sup>®</sup>  
HPS NORTH AMERICA