


**PVC
FREE**



ABPURE | OCCUPANCY READY PVC-FREE RUBBER TILE

ABPURE[®] Nfuse[®]
It's PURE Science.

Informed flooring decisions based on science.

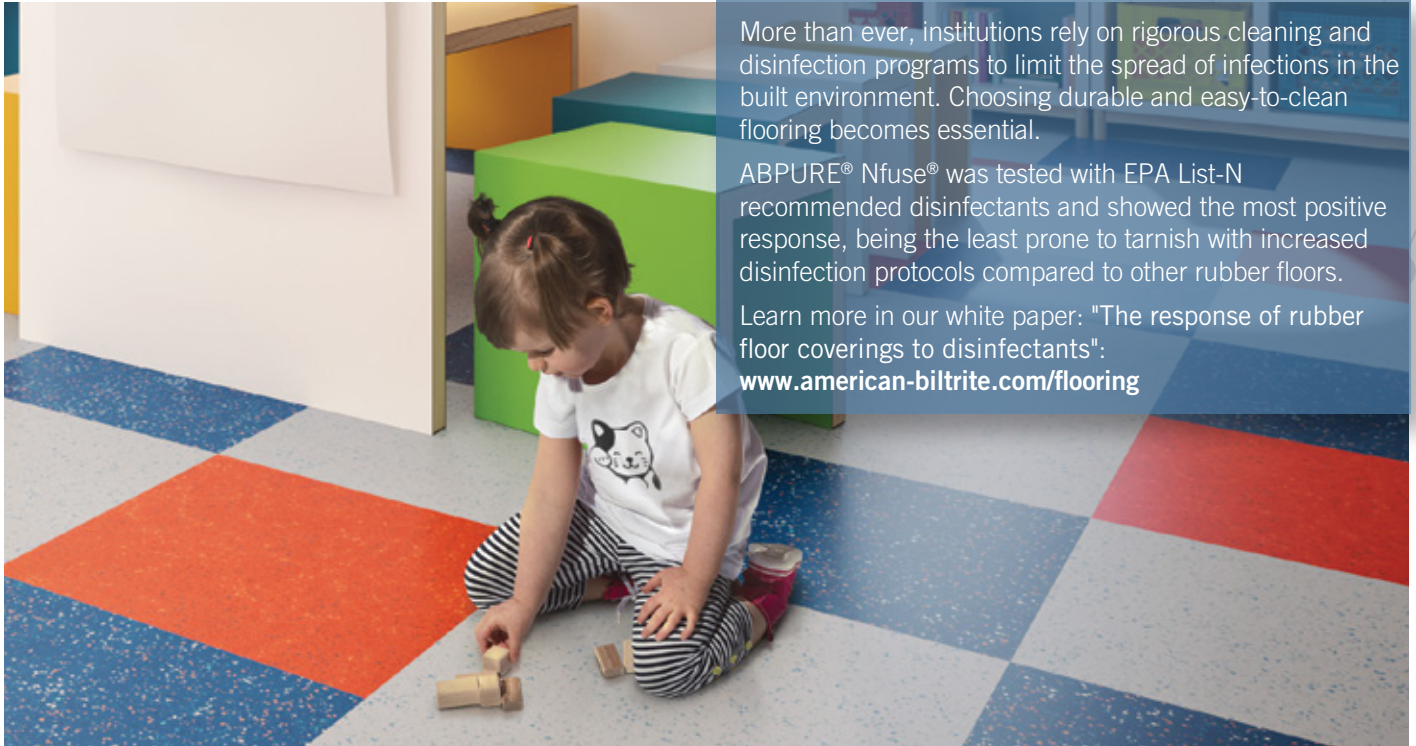

More than ever, institutions rely on rigorous cleaning and disinfection programs to limit the spread of infections in the built environment. Choosing durable and easy-to-clean flooring becomes essential.

ABPURE® Nfuse® was tested with EPA List-N recommended disinfectants and showed the most positive response, being the least prone to tarnish with increased disinfection protocols compared to other rubber floors.

Learn more in our white paper: "The response of rubber floor coverings to disinfectants":

www.american-biltrite.com/flooring

Nfuse[®]
technology


ABPURE Nfuse is an occupancy ready rubber flooring allowing to save time and money during installation and beyond - and is a better choice for environmental sustainability.

BEFORE



Rubber Surface Pores Exposed

WITH NFUSE TECHNOLOGY

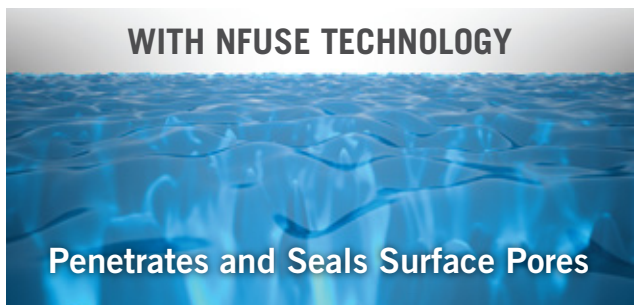

Penetrates and Seals Surface Pores

Nfuse technology is an overall product treatment technology that penetrates into the pores and seals the flooring.

- > No initial set-up required
- > Immediate access
- > No waxing, stripping or sealant, for the lifetime of the floor, which means no negative impact on wastewater systems and better indoor air quality
- > Excellent stain and tarnish resistance
- > Easy to clean

ABPURE Nfuse

It's PURE Science.




Nfuse Advantage

- Featuring the Nfuse patented technology that penetrates the pores and seals the rubber flooring
- No initial set-up required with immediate access
- No waxing, stripping or sealant, for the lifetime of the floor,
- Excellent stain and tarnish resistance, and easy to clean



Easy to Clean & Disinfect

- Tested with EPA List-N disinfectants approved for use against SARS-Cov-2
- Superior color, stain and tarnish resistance
- Consult our white paper on the reaction of repeated disinfection protocols on resilient flooring at: american-biltrite.com/flooring



Exceptional PURE Colors

- Pure white, clean beiges and crisp blues that last
- Patented formulation ensures long-lasting vibrant colors
- Best colorfastness and UV stability, meeting ASTM F 1515 requirements
- 10-year colorfastness guarantee
- NO Yellowing!



PVC-Free Flooring

- Does not contain additives, such as phthalates and chlorine, which have raised health concerns due to their potential impacts on human health.
- PVC-free flooring has a low level of Volatile Organic Compounds (VOCs) which can help improve indoor air quality and reduce potential health problems such as headaches, respiratory problems, and nausea.

Occupancy Ready

- No initial set-up, stripping, sealing, or waxing after installation and beyond
- Lower maintenance costs and reduced installation time
- No harmful impact on water waste management and better indoor air quality



A Sustainable Choice

- Declare & Red List Free
- PVC free, chlorine free, phthalate free, no formaldehyde, and crystalline silica free
- FloorScore® certified for best indoor air quality
- Product specific EPD Type III

Declare.

Ergonomic properties

- Better acoustic – reduced ambient noises
- More flexible, offering better comfort for feet and joints




Reliable supplier

- Essential supplier to the healthcare, transportation, military and pharmaceutical industries
- Remained in operation during the Coronavirus pandemic with no supply chain disruptions
- Made it through two World Wars, the Great Depression, and the Spanish flu


ABPURE NFUSE IMAGINE | 36 Colors

All colors available in:


- > Smooth profile (ABT), 2 or 3 mm thickness, 18" x 18" and 36" x 36" formats
- > Hammered profile (ABM), 3 mm thickness, 18" x 18" and 36" x 36" formats




ABT-34
Glaciar




ABT-38
Steel




ABT-23
Anthracite




ABT-94
Forget-me-not




ABT-31
Gainsboro Valley



ABT-33
Pebble Beach



ABT-37
Battleship Gray




ABT-90
Baby Blue




ABT-41
Linen



ABT-30
Sand Castle



ABT-32
Appalachian Trail




ABT-83
Pistachio




ABT-15
Snowstorm



ABT-35
Ash Gray




ABT-20
Starry Night




ABT-45
Wheat

To order tiles with **Hammered** profile: Apply **ABM** code (instead of ABT) before the color number.



ABT-95
Electric Blue




ABT-68
Rich Lavender




ABT-73
Banana Candy



ABT-74
Buff




ABT-92
Aquamarine



ABT-98
Blue Lagoon



ABT-75
Orangerine




ABT-52
Terracotta




ABT-85
Olive Green




ABT-87
Tundra




ABT-53
Land of Fire



ABT-55
Fire Engine Red




ABT-36
Tan



ABT-39
Camouflage Green




ABT-57
Chestnut



ABT-58
Espresso

COLOR COORDINATED COLLECTIONS

ABPURE Nfuse is also available in **sheet format** featuring the same Imagine chip configuration and colors found in the tile collection. This allows for harmonious color coordination and seamless design flexibility.



ABT-72
Limoncello



ABT-51
Capuchin



ABT-66
Doll House



ABT-56
Shiraz




All 36 colors shown are available in rolls of 5 feet wide and up to 50 feet long in 2 or 3 mm thicknesses and smooth paper finish embossing.


To view physical samples and colors, refer to ABPURE IMAGINE folders.

PROFILES

HAMMERED (ABM)

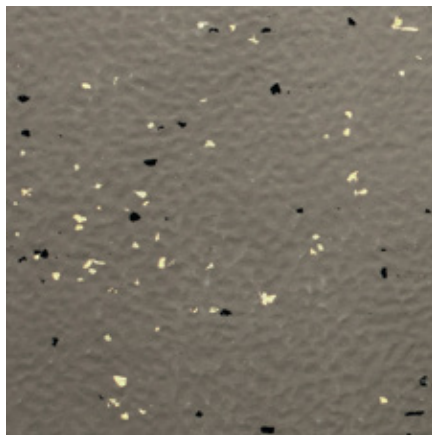

SMOOTH (ABT)

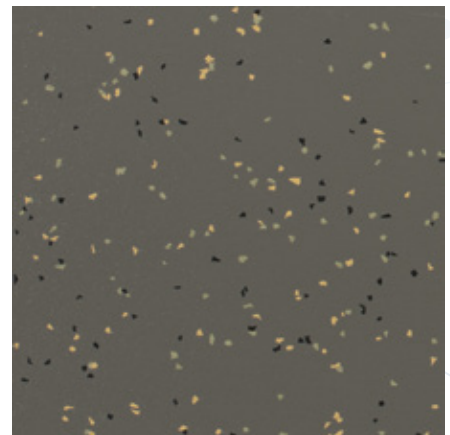

Samples available at:

**material
bank** 

CUSTOM COLORS

For special projects, custom colors can be created that perfectly match your design needs.
Minimum order quantity required.



PANTONE
273 C

SW 6970
Venture Violet
Interior / Exterior

SW 6889
Stirring Orange
Interior / Exterior

SW 6897
Sundance
Interior / Exterior

Design cohesive and captivating interiors by perfectly matching your color palette; such as walls, furniture, accessories, etc.

Choose **any base color** to match and then choose up to 3 chip colors from our 36 standard colors.

ABPURE® RUBBER TILE WITH NFUSE TECHNOLOGY

TECHNICAL SPECIFICATIONS

Gauge	ABM, ABT ABT	3 mm 2 mm	0.118" 0.079"	Sizes	ABT ABT ABM ABM	902 mm x 902 mm 450 mm x 450 mm 906 mm x 906 mm 452 mm x 452 mm	35.000" X 35.000" 17.705" X 17.705" 35.687" X 35.687" 17.798" X 17.798"
-------	-----------------	--------------	------------------	-------	--------------------------	--	--

Product Classification:

ASTM F1344	Rubber Tile Floor	Type 1, A or B (Homogeneous)
ASTM D2047	Static Coefficient of Friction (leather / Neolite)	≥ 0.5
ASTM D3389	Abrasion Resistance (H-18,500 g @ 1,000 cycles)	Pass
ASTM E648	Critical Radiant Flux CRF (W/cm²)	≥ 0.45
ASTM E662	Smoke Density	≤ 450
ASTM E989 / E492	Sound Absorption (with a suspended ceiling)	IIC 59
ASTM F925	Chemical Resistance	Exceeds
ASTM F970	Static Load	≤ 0.005"
ASTM F1514	Heat Stability	ΔE ≤ 8.0
ASTM F1515	Light Stability	ΔE ≤ 8.0
ASTM G21	Antimicrobial Resistance Test	Pass (28 days)

Indoor Air Quality (IAQ):

Volatile Organic Compounds (VOC's) FloorScore Certified by SCS Certification

Adhesives:	AD-777	Regular traffic
	AD-590	Heavy rolling loads, under patients' beds, non-acclimatized areas
	AD-599MR	High moisture substrate, heavy rolling loads, under patients' beds, non-acclimatized areas

Limited Wear Warranty 10 years

Resistance to oils and greases ABPURE® is not recommended for environments where it could be exposed to oils and greases, whether mineral, animal or vegetable.

Antimicrobial IMPORTANT: All our ABPURE rubber flooring, through its composition and without the use of antimicrobial chemicals, does not promote microbial growth.

Please note that technical website documents prevail. ® / ABPURE is a registered trademark of American Biltrite ® / Nfuse is a registered trademark of American Biltrite

yorkshire.com



Declare.

Yorkshire Commercial Interiors

3551 W 1st St. Sanford, FL 32771

To order samples: Yorkshire@Yorkshire.com | 866-966-7563

Printed in Canada BRO-E5-HST Issued: 08/2025