



Nature's Collection

by dinoflex

Naturally **Elegant.**
Naturally **Beautiful.**

RETAIL ■ HOSPITALITY ■ COMMERCIAL ■ EDUCATION



RECYCLED
RUBBER
FLOORING

Sophisticated and elegant, Nature's Collection blends the durability and versatility of recycled rubber with the style of sustainably harvested cork. By infusing cork granules we add depth and texture to the surface, while the vivid colors of the EPDM offer contrast, coming together for a perfectly balanced design that is sure to leave you impressed.



Made for
Designers.

We have combined characteristics that are similar yet complementary to one another, giving you a product with superb performance and a visual dimension not typically found with rubber surfaces.

Features

- Sustainably harvested cork granules
- Aesthetically versatile
- Increased insulation properties
- Durable
- Ergonomic benefits
- Natural resistance to mold and mildew
- Sound absorbing
- High traction

Benefits


- Renewable source which does not harm the planet
- Design a space that is uniquely different
- Spaces will hold heat and remain warm
- Resists abrasions and indentations, resulting in a long-life expectancy
- Provides relief to a person who stands for long periods of time
- Great for high moisture environment areas
- Increased acoustic properties over other resilient products
- Eliminates the need for non-slip matting

Best For

Commercial
Hospitality

Lobbies
Multi-use Facilities

Office Spaces
Retail

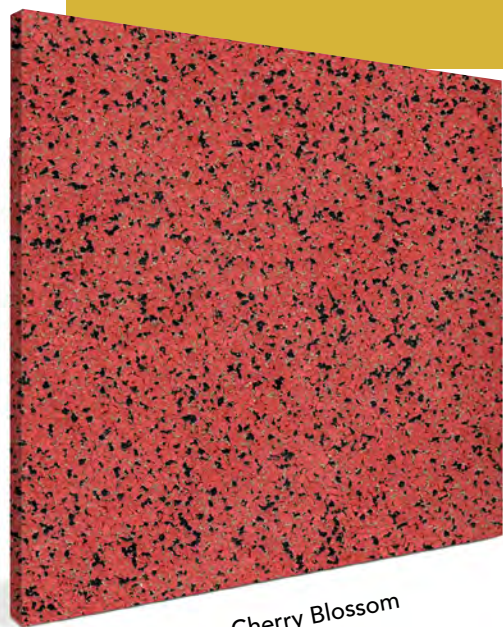

Color: Cherry Blossom

Tolerance of +/- 0.5mm

Square Cut Glue Down

38" x 38" = 10.0ft²
(96.5cm x 96.5cm = 0.93m²)

STANDARD THICKNESS



4mm (5/32")
5mm (3/16")
6mm (1/4")
7mm (9/32")
8mm (5/16")

Interlocking Loose Lay


37" x 37" = 9.5ft²
(94cm x 94cm = 0.88m²)

STANDARD THICKNESS


7mm (9/32")
8mm (5/16")



Color Swatches




COFFEE BEAN
- CORB1




MOON SHADOW
- CORB2




ASHES
- COR3B




CANYON
- CORR11




CARRIBEAN
- COR08




FOSSIL
- COR1B




STONE
- COR05




BARK
- COR1T




BLUE BELLS
- COR7G




IRIS
- COR07




OCEAN
- COR3A




ORCHID
- CORC5




PINE TREE
- COR1P




SAPPHIRE
- COR1Q




CHERRY BLOSSOM
- COR7E




DAFFODIL
- COR09




MEADOW GRASS
- COR2H



MONARCH
- COR1R



MOSS
- COR2M



WATERFALL
- COR2G

Contact your Sales Representative for more information.

Colors shown are reproduced as closely as possible to actual product. Contact Dinoflex for product sample.

This product must be coated with Dinocoat.



Click here to design your own Recycled Rubber Color.

Testing Results

DESCRIPTION	TEST METHOD	RESULT
Sound Absorption / Noise Reduction Coefficient	ASTM C423	SAA - 0.04
		NRC - 0.05
Taber Abrasion	ASTM C501	Weight Loss 0.92 grams (1.39%)
Compression Set Under Force	ASTM D395B	82.2% Recovered; 17.8% Unrecovered
Breaking Load and Elongation	ASTM D412	Elongation - 48.71%
		Tensile - 204.4 lbs/sq. in.
Static Coefficient of Friction	ASTM D2047	Dry 0.78
Hardness Shore A Durometer	ASTM D2240	65
Impact Sound Transmission	ASTM E492	IIC 58
Critical Radiant Flux	ASTM E648	0.48 watts/sqaure cm
Flexibility	ASTM F137	6mm Mandrel PASS
Electrical Resistance - Surface to Ground	ASTM F150	4.0×10^{10} ohms (average)
Electrical Resistance - Surface to Surface	ASTM F150	2.8×10^{11} ohms (average)
Resistance to Chemicals (5 min & 24 hr)	ASTM F925	Slight to Moderate Color Change from 5% Acetic Acid, Mineral Oil, 5% Phenol, Kerosene and Olive Oil
Static Load (250 lbs)	ASTM F970	0.009 inch residual compression
Short Term Indentation (140 lbs)	ASTM F1914	-0.064 inch residual indentation

Please Note: All measurements are subject to nominal variation.

Yorkshore Commercial Interiors
 A BuildDirect Company
 3551 W 1st St
 Sanford, FL 32771

Tel: **866-996-7563**
Yorkshore@Yorkshore.com
yorkshore.com

**10 year
 Limited Warranty**

when installed in accordance with
 Dinoflex's Installation Guidelines.

Date Issued:

