








Outdoor living at its most beautiful.

ROOFTOPS ■ PATIOS ■ HEALTH CARE ■ LANDSCAPES



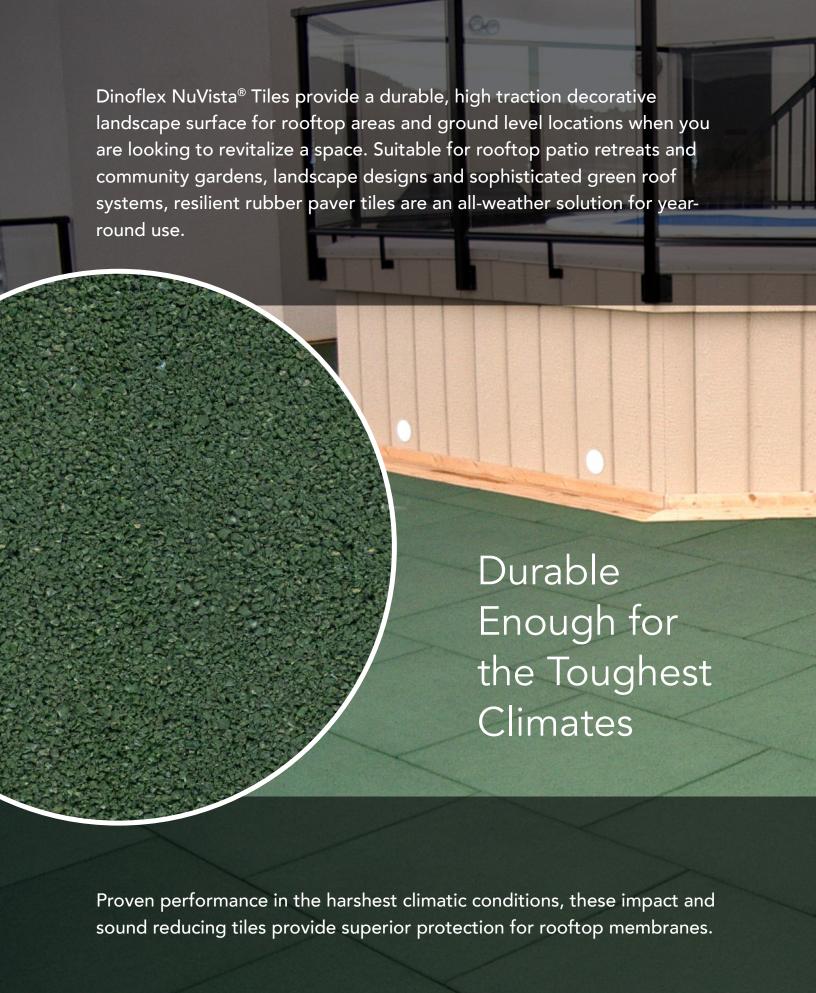

Features

- High traction
- Withstands temperature fluctuations
- Impact absorbing
- Grid backing & water permeable
- No-glue interlocking system
- Easy to maintain

Benefits

- Slip resistant even when wet
- Will not buckle or crack under extreme outdoor temperature changes
- Reduces fall consequences
- Pourus in nature, allows water to flow through and create channels for drainage
- Easy and quick installation
- Advanced maintenance program not required

Best For

Apartment Complexes

Decks

Garden and Green Spaces

Health Care

Landscapes

Office Buildings

Balconies

Restaurants

Rooftop Patios

Schools

Walkways



Interlocking Tile

 $24'' \times 24'' = 4ft^2$

 $(61cm \times 61cm = 0.37m^2)$

STANDARD THICKNESS

1" (25.4mm)

1 3/4" (44mm)

2 1/2" (69.85mm)

Interlocking System

Dinoflex self-aligning interlocking system provides for a fast and accurate installation. Interlocking tubes are included with every order for a nominal cost.



Interlocking Pins



Interlocking Tubes



Interlocking Tile



Tile Back

Color Swatches















BLUE EMBER

FOREST GREEN

STONE BEIGE

TEAK BROWN

RED

BL

EPDM Variations













25% BLUE

25% GREEN

25% BEIGE

25% BROWN

25% RED

25% ORANGE













50% BLUE

50% GREEN

50% BEIGE

50% BROWN

50% RED

50% ORANGE













75% BLUE

75% GREEN

75% BEIGE

75% BROWN

75% RED

75% ORANGE

Contact your Sales Representative for more information. Colors show are reproduced as closely as possible to actual product. Contact Dinoflex for product sample.



Click here to design your own Recycled Rubber Tile.



Testing Results

DESCRIPTION	TEST METHOD	RESULT
Aging Weathering	ASTM C67	No change
Aging Weathering	ASTM D573	No change
		Machine (Length) Direction:
		24 hours submerged in 0.1% detergent solution at 23°C: +0.059%
		24 hours in deep freeze at -18°C: +0.218%
		72 hours in drying oven at 70°C: +0.455%
		Forty eight hours conditioning at 20°C and 65% relative humidity: +0.457%
Dimensional Stability	DIN EN 13746	
		Cross Direction:
		24 hours submerged in 0.1% detergent solution at 23°C: -0.205%
		24 hours in deep freeze at -18°C: -0.201%
		72 hours in drying oven at 70°C: -0.226%
		Forty eight hours conditioning at 20°C and 65% relative humidity: -0.224%
Water Drainage		4 litres drained in 306.71 seconds (5.1 minutes)

Please Note: All measurements are subject to nominal variation.

Yorkshore Commercial Interiors A BuildDirect Company 3551 W 1st St Sanford, FL 32771 Tel: 866-996-7563 Yorkshore@Yorkshore.com yorkshore.com







5 year Limited Warranty

when installed in accordance with Dinoflex's Installation Guidelines.

Date Issued: