



# **catalogue /2021**

**fuse flooring**

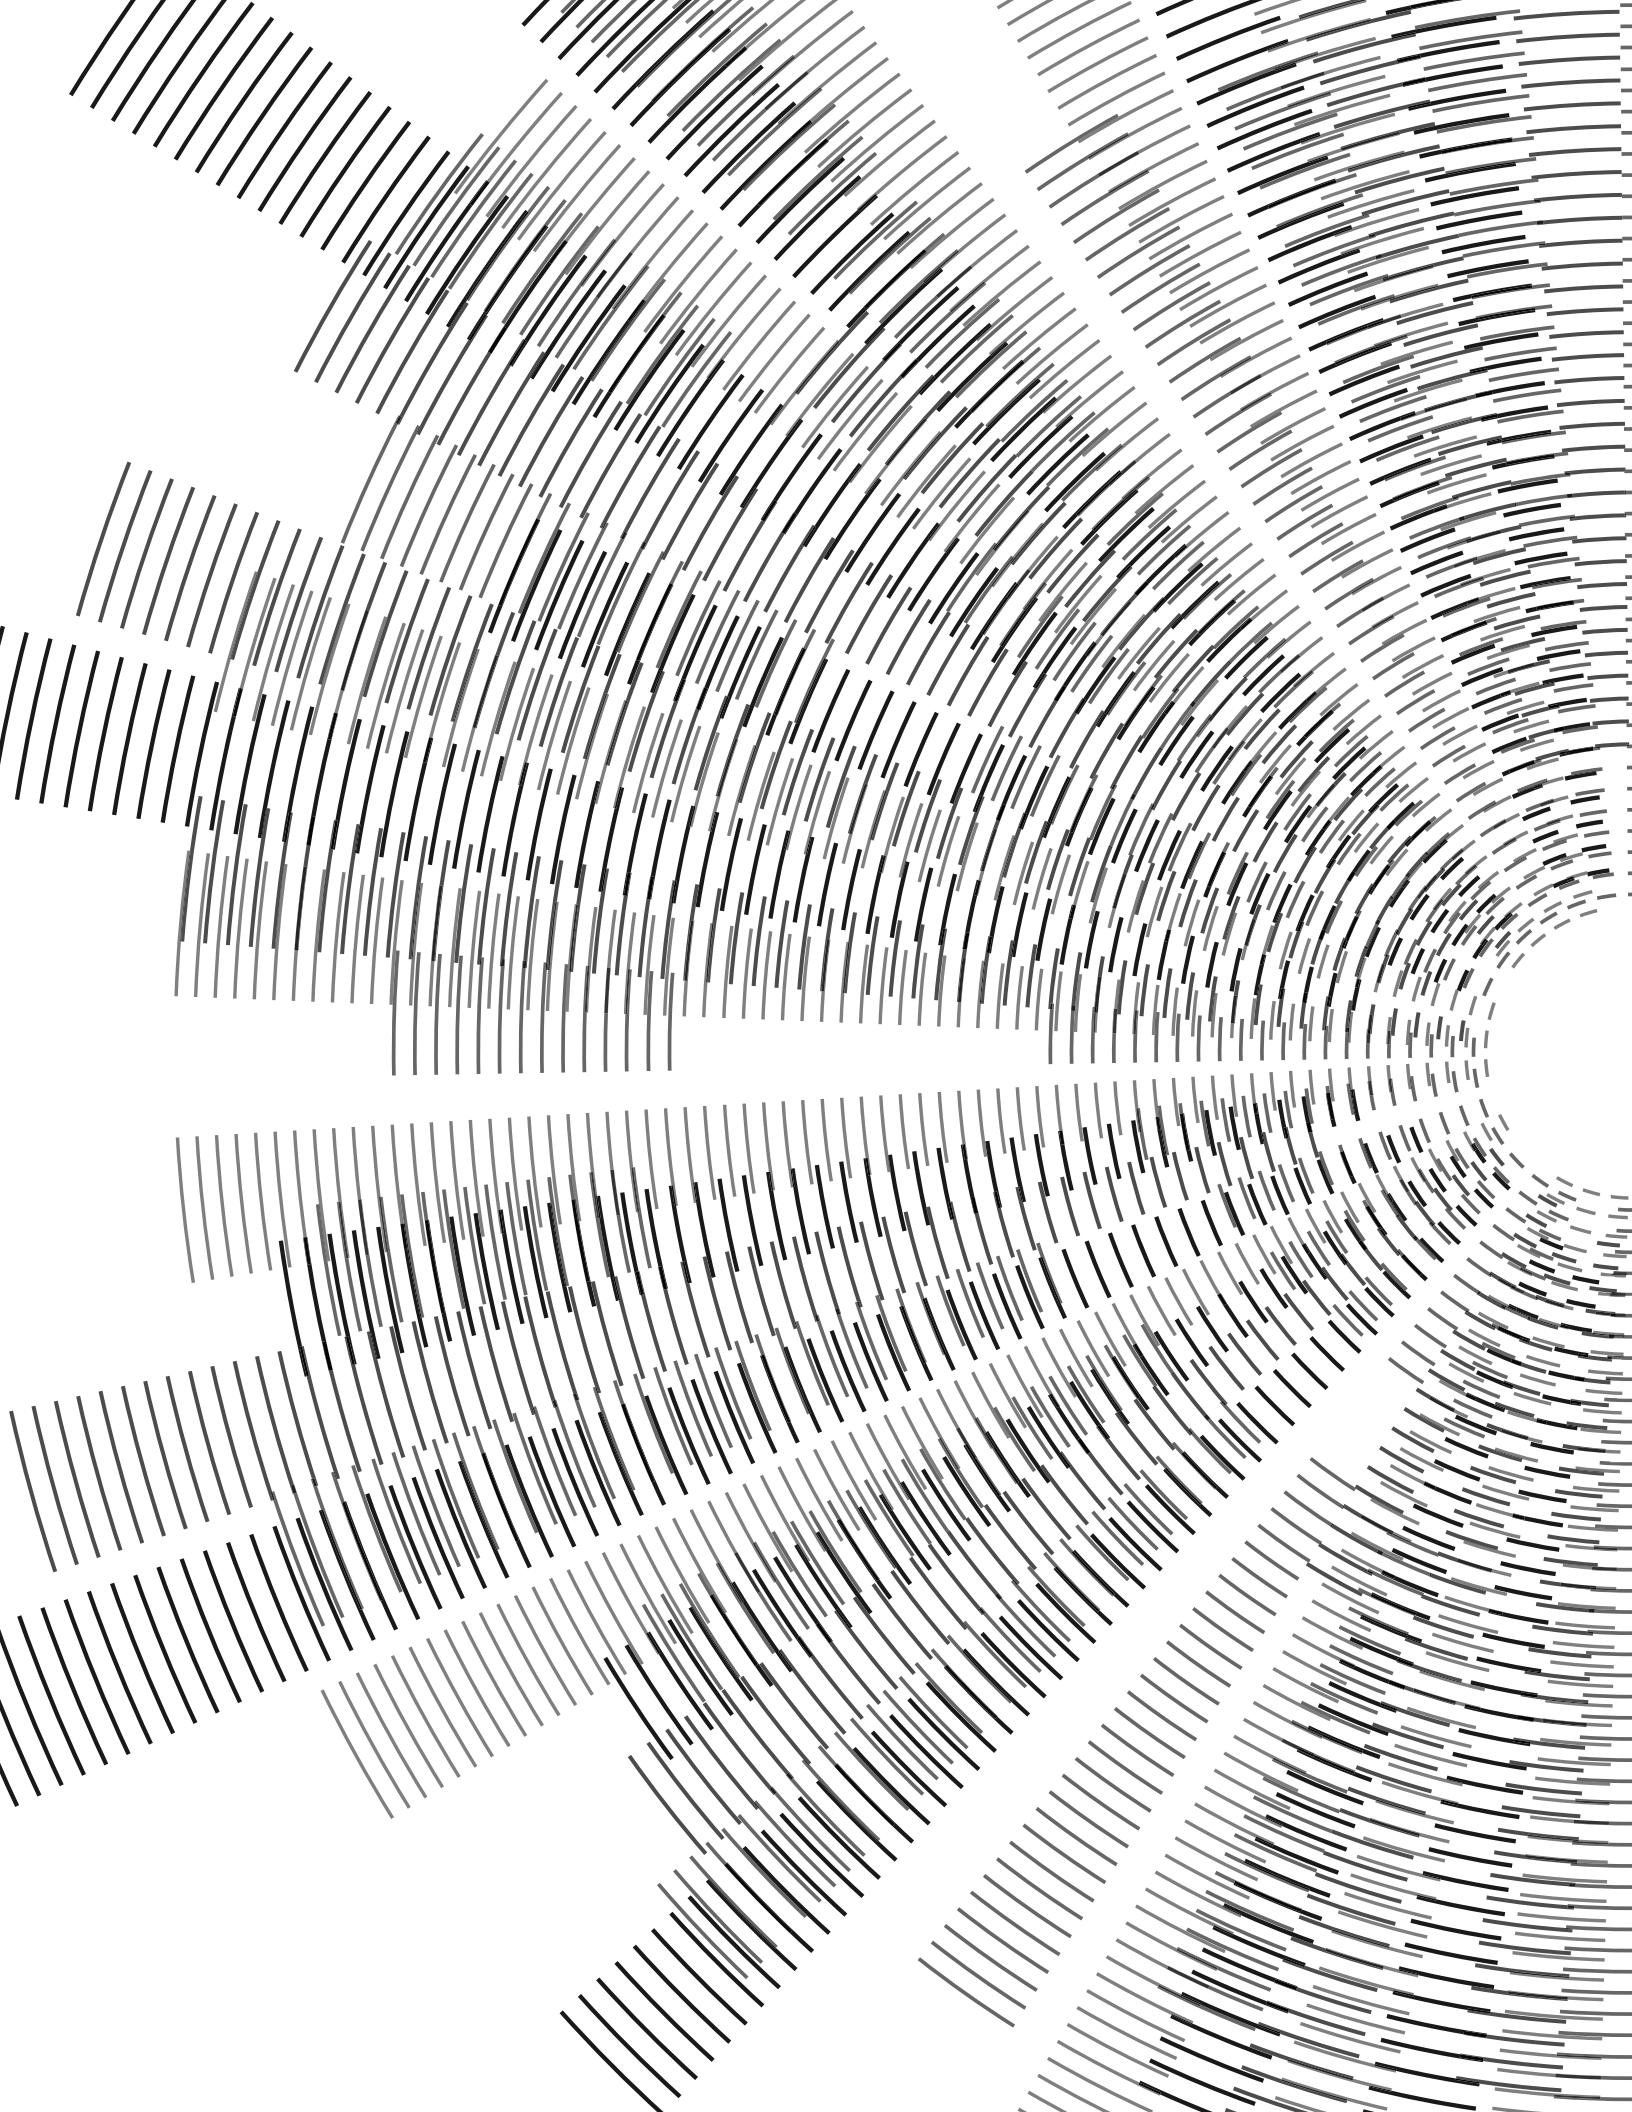

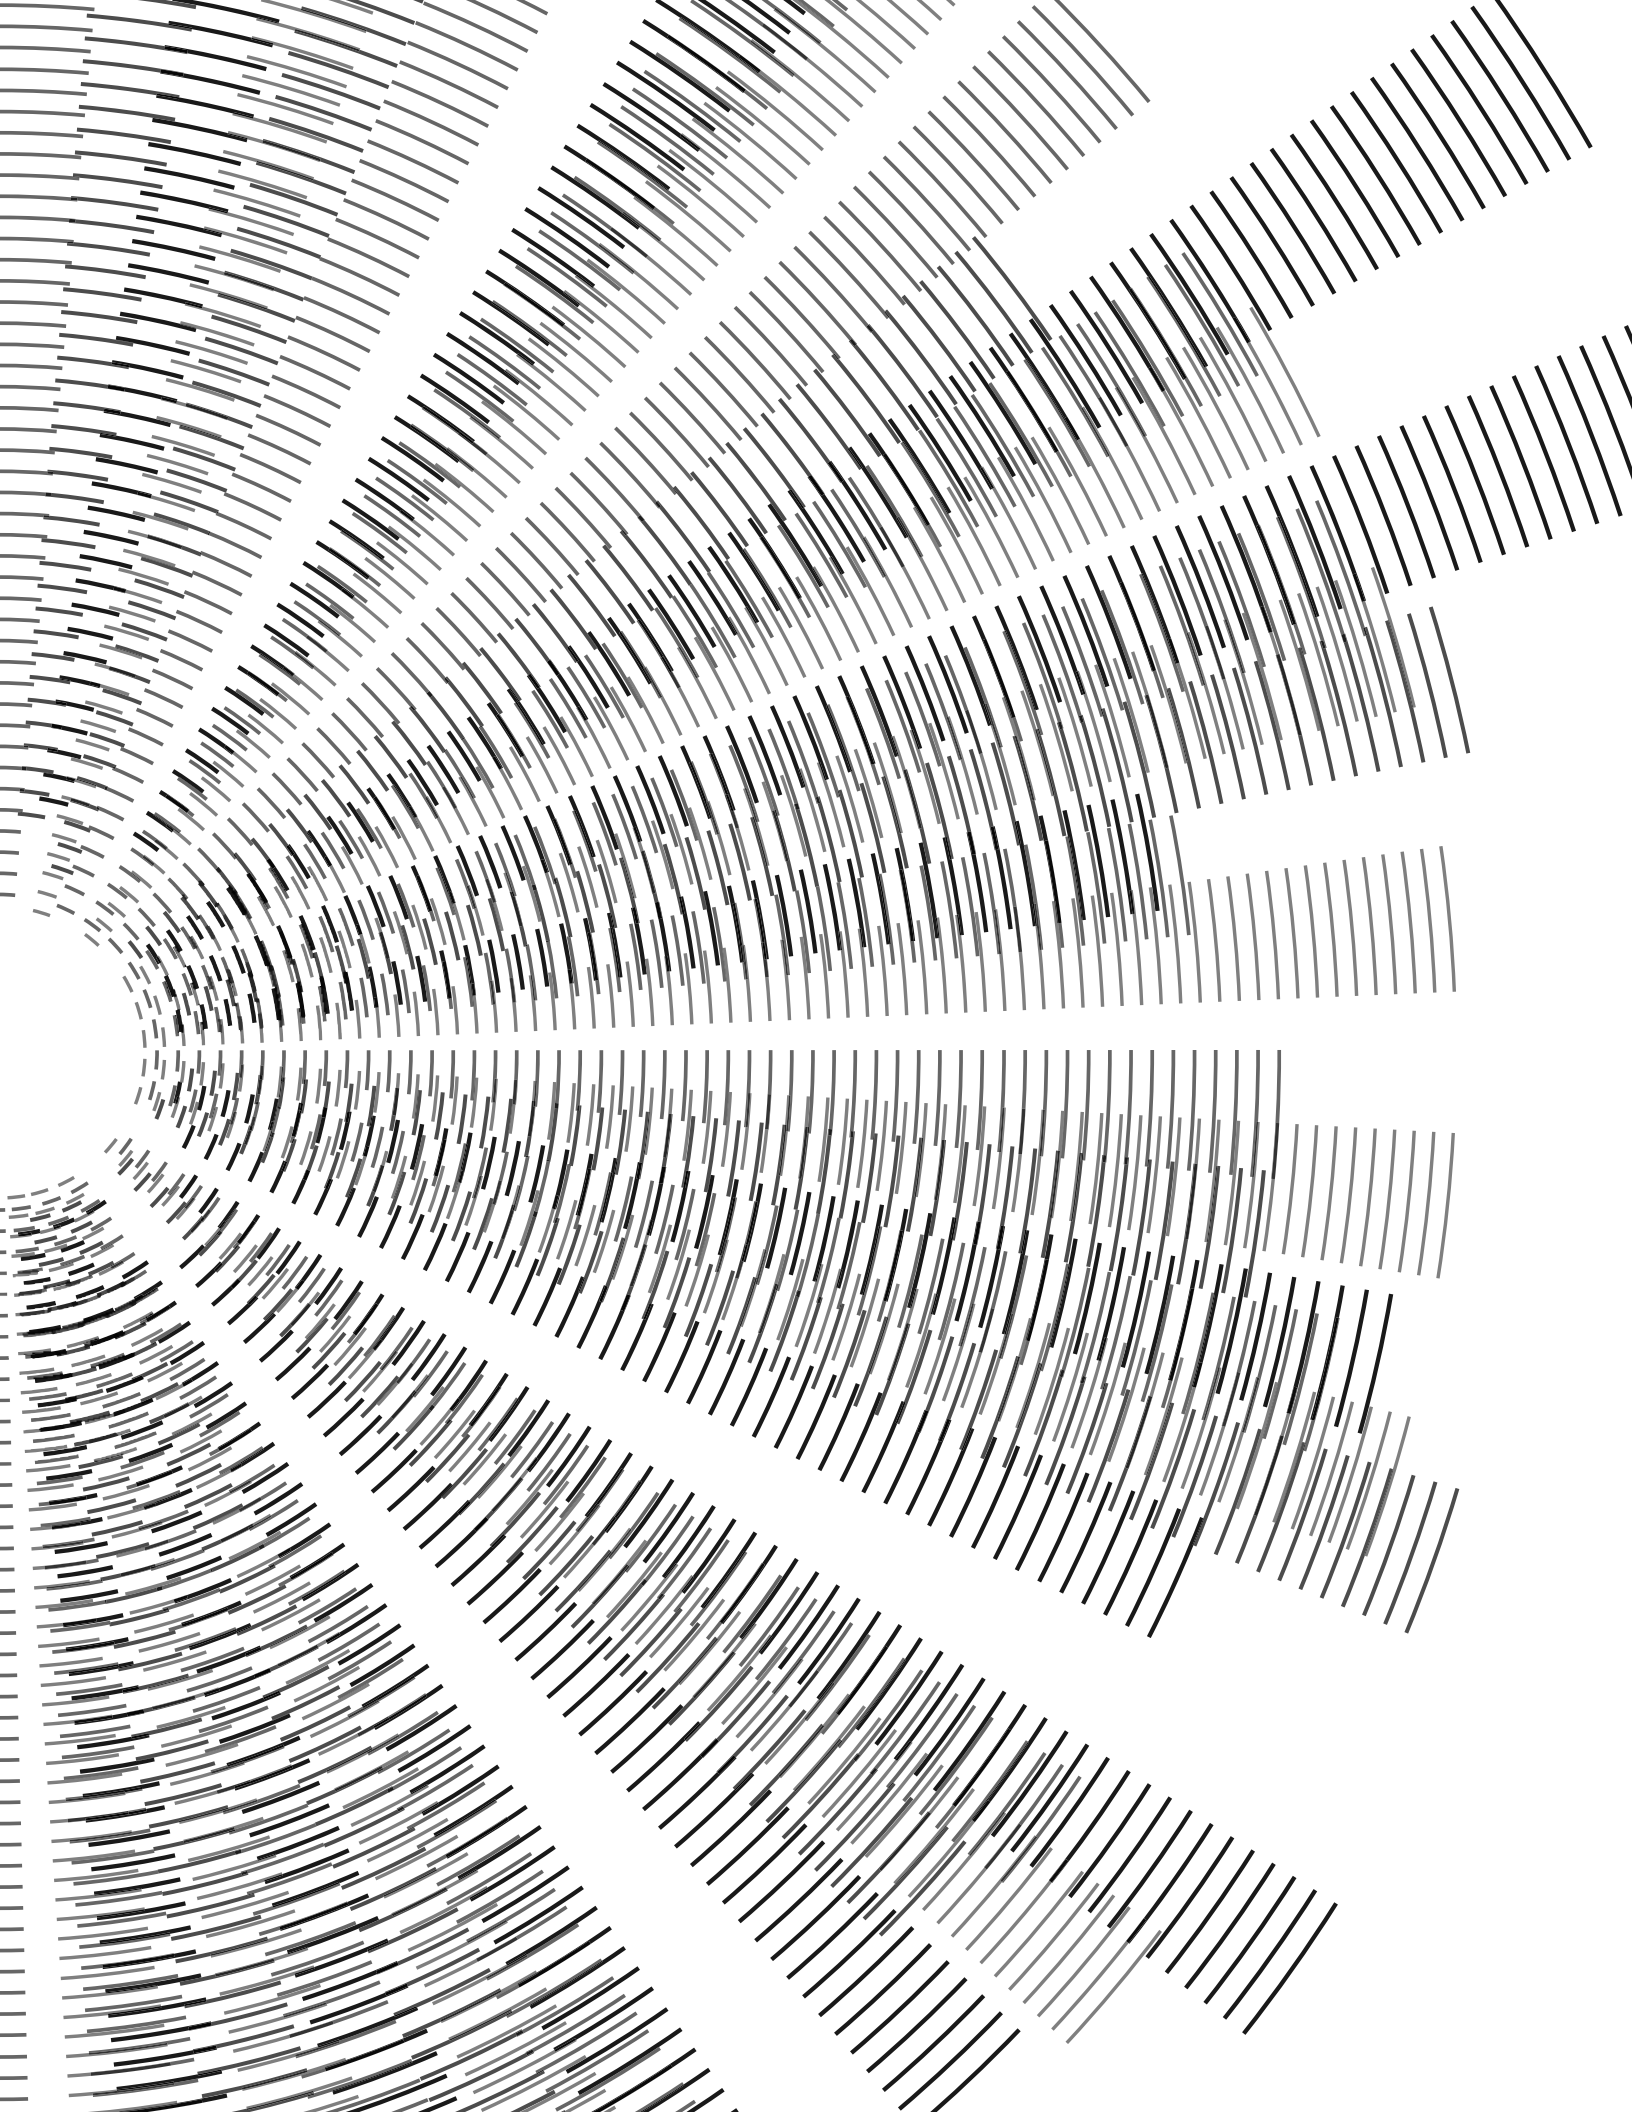

# about

**enhancing the intrinsic  
beauty of wood.**

Fuse Flooring results from an appreciation of nature - its ability to create and to inspire. We're moved by its uneven grain, its knots, and unpredictability. Our desire is to enhance the intrinsic beauty of wood.

This appreciation drives us to provide the best and most beautiful wood floors.

# sustainability

---

## Sustainable Materials

---

All wood in Fuse Flooring products comes from sustainably grown and harvested forests. The wood is fully certified on its journey from seed to board.

**certified real  
wood**

## Health Conscious

---

Materials and manufacturing are chosen to create a healthy product. Multiple certifications for low volatile organic compound (VOC) emissions ensure little to no impact on indoor air quality.

## Responsible Manufacturing

---

Products are made in Germany and Austria where strong labour laws ensure workers are paid fairly and work in safe environments.

## Longevity

---

High quality products last longer and are replaced less frequently. Our floors' structural stability and refinishing options allow the floor to last for decades.

---

# certifications

---

## PEFC

---

The Programme for the Endorsement of Forest Certification (PEFC) is a global body that ensures sustainable forest management and prevents deforestation. It is similar and often considered equivalent to FSC.



## Floor Score

---

A third-party certification indicating low to zero VOC emissions. All parts of the product are tested including the wood, finish, and adhesive.



## Émissions Dans l'Air Intérieur A+

---

Measures total VOCs of 10 different substances for interior products. Class A+ is the lowest level of emissions that can be achieved.



## CARB2 Compliant

---

The CARB 2 standard is a limitation on formaldehyde emissions. Created by the California Air Resources Board (CARB), their mandates are strict and the standard across the industry.



## Real Wood

---

Certifies that the product is made exclusively from wood and not composite materials that may contain plastic or other synthetics.

# flyt herringbone c

---

bass / perch / pla  
breast / skate



# ollection/

---

# ice /


flyt herringbone

by fuse flooring

# **herringbone collection**

---

Subtle colour variation brings life to the herringbone pattern. Named after fish who's scales inspired the pattern's name, the collection features five colours for traditional and contemporary spaces. Can be installed as a floated floor.

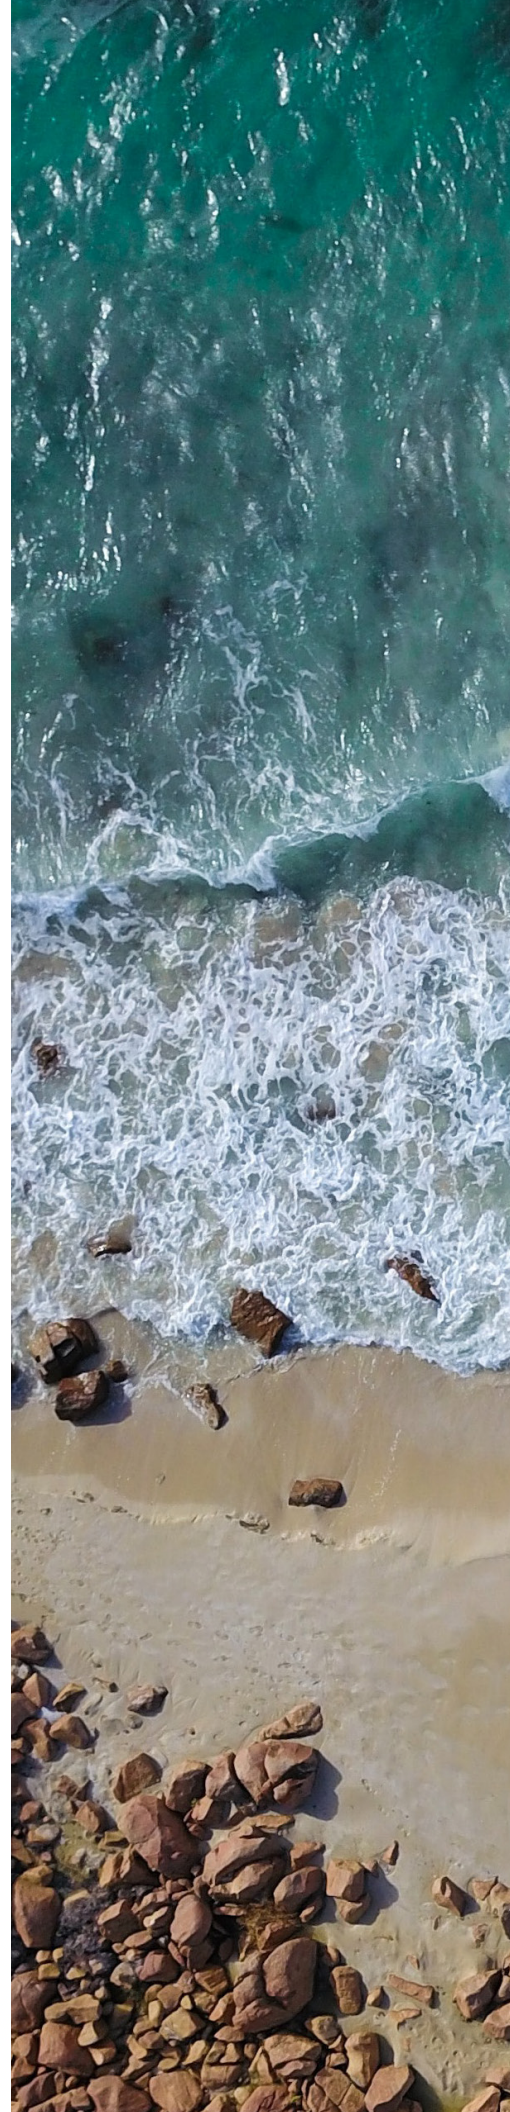












# features

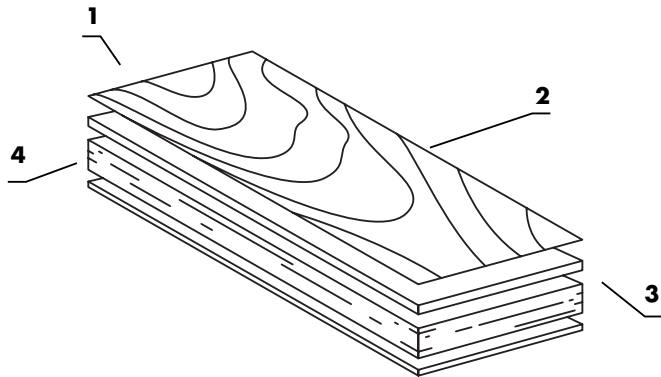

## dimensions

1/2" H x 3 3/4" W x 22 7/16" L



## 1 / surface

Matte Bona Lacquer



## 2 / texture

Brushed



## 3 / top layer

White Oak



## 4 / core

Flatsawn




## installation

Glue Down or Float  
Radiant Heat Compatible



# herringbone assembly

Connection Drop and Lock ("click")  
Bevel 4-sides



# accessory options

Made from the same material as the floor  
for a perfect match.

## stairs

Full cladding: riser, tread, and nosing  
Up to 78" wide



## vents

All wood, with damper. Two sizes:  
3" W x 10" L  
4" W x 10" L



## nosing

Up to 78" long, 4 1/4" wide




## flush reducer

Up to 78" long, 1 3/4" wide




## t-mould

Up to 78" long, 1 3/4" wide





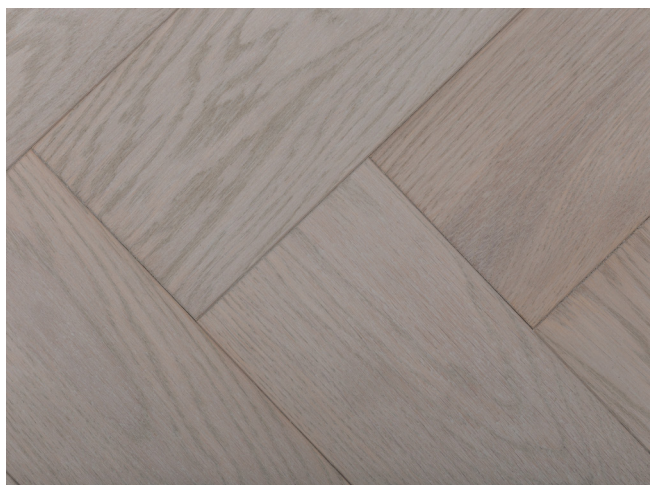


---

**bass**



---

**perch**

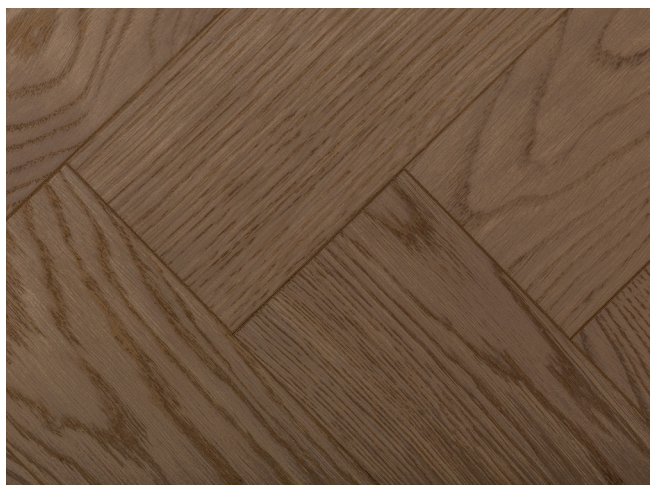

---

**plaice**

---







---

**bream**



---

**skate**



# herringbone specs

## 1 / product

### collection

Flyt

### style

Herringbone

### finish

Bona urethane

### surface

Brushed

## 2 / construction

### type

Engineered hardwood

### layers

3-layer

### edge

Bevel 4-sides

### connections

Drop and lock ('click')

### dimensions

1/2" H x 3 3/4" W x 22 7/16" L

## 3 / wood

### species

White Oak

### grade

Natural

### treatment

Stained

### cut

Flatsawn

### hardness

1360 (Janka scale)

## 4 / layers

### lamella

White Oak

### thickness

Nominal 1/8"

### core

Spruce

### thickness

3/8"

### backing

Spruce Ply

## origins

Made in Austria or Germany

## certifications

PEFC  
Floor Score  
Émissions Dans l'Air Intérieur A+  
CARB2 Compliant  
Real Wood











# grade guide



## select

|                             |   |             |
|-----------------------------|---|-------------|
| Maximum size of sound knots | — | 15 mm       |
| Maximum size of open knots  | — | Not allowed |
| Heart / Pith                | — | Not allowed |
| Sapwood                     | — | Not allowed |
| End checks / End cracks     | — | Not allowed |
| Small cracks                | — | Not allowed |
| Colour Variation            | — | Harmonic    |
| Ingrown bark                | — | 15 mm       |



## nature

|                             |   |                                       |
|-----------------------------|---|---------------------------------------|
| Maximum size of sound knots | — | 30 mm                                 |
| Maximum size of open knots  | — | 15 mm                                 |
| Heart / Pith                | — | Not allowed                           |
| Sapwood                     | — | Not allowed                           |
| End checks / End cracks     | — | Not allowed                           |
| Small cracks                | — | Allowed / up to<br>100 mm long & 1 mm |
| Colour Variation            | — | Harmonic                              |
| Ingrown bark                | — | Not allowed                           |




Hardwood grades are based on the size and number of clear pieces that can be obtained from a board.

Grades are not determined by gut reactions but actual measurements of clear sections and definitions for characteristics.



## living / classic

|                             |   |                                                  |
|-----------------------------|---|--------------------------------------------------|
| Maximum size of sound knots | — | 50 mm                                            |
| Maximum size of open knots  | — | 25 mm                                            |
| Heart / Pith                | — | Not allowed                                      |
| Sapwood                     | — | Allowed /<br>2 cm both sides<br>or 4 cm one side |
| End checks / End cracks     | — | Not allowed                                      |
| Small cracks                | — | Allowed / up to<br>100 mm long & 1 mm            |
| Colour Variation            | — | All colours                                      |
| Ingrown bark                | — | Not allowed                                      |

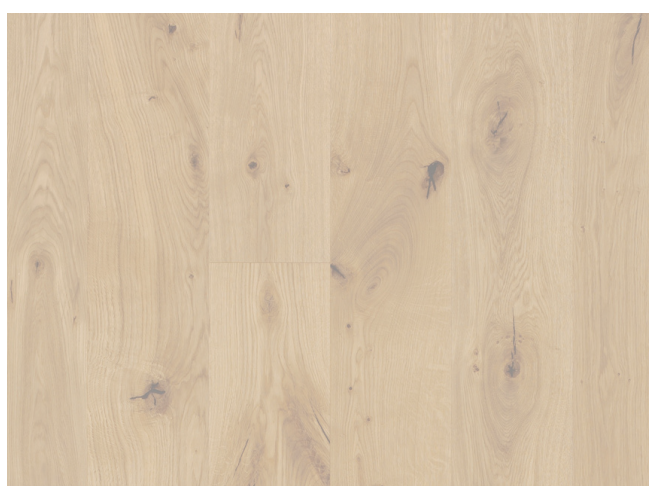

## rustic

|                             |   |                                       |
|-----------------------------|---|---------------------------------------|
| Maximum size of sound knots | — | 80 mm                                 |
| Maximum size of open knots  | — | 50 mm                                 |
| Heart / Pith                | — | Allowed                               |
| Sapwood                     | — | Not allowed                           |
| End checks / End cracks     | — | Allowed / up to<br>400 mm long & 8 mm |
| Small cracks                | — | Allowed / up to<br>1105 mm & 1 mm     |
| Colour Variation            | — | All colours                           |
| Ingrown bark                | — | Allowed / up to<br>50 mm long & 3mm   |

**fuse**

 **Yorkshire**  
COMMERCIAL INTERIORS

**Yorkshire Commercial Interiors**  
A BuildDirect Company  
3551 W 1st St. Sanford, FL 32771

Tel: 866-996-7563  
**Yorkshire@Yorkshire.com**  
**yorkshire.com**

